


# COMFAST®

300Mbps

80m<sup>2</sup> Coverage

Wireless

Repeater

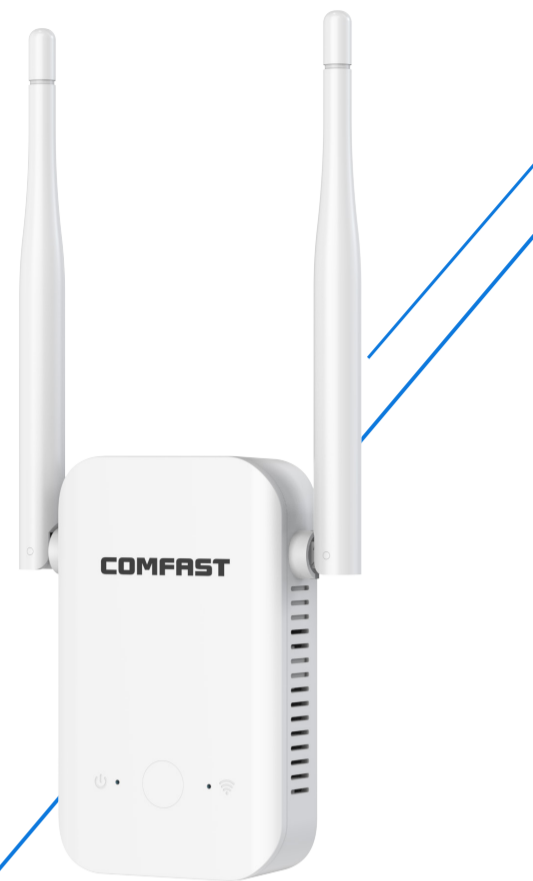

**CF-WR301S V2**

Chipset	MT7628KN; DDR:8MB, Flash:2MB
Antenna	2*3dBi external Antennas
Wireless Standard	IEEE802.11b/g/n
Transmission Rate	11b: 1/2/5.5/11Mbps 11g: 6/9/12/18/24/36/48/54Mbps 11n: 300Mbps
RF Parameters	Output Power (Max): 82mW(19dBm) Receiver Sensitivity (Min): -96dBm Frequency: 2.412~2.472GHz
Button	1*WPS/RST Button
Indicator	Power Indicator(Blue Color) WiFi Indicator(Blue: Good Signal; Red: Weak Signal)
Power	100~240V,50/60Hz
Bandwidth	20/40 MHz Auto
Encryption	WPA-PSK / WPA2-PSK / WPA / WPA2
Working Mode	Repeater Mode
Case	Plastic Case (ABS Material)
Physical Features	Size: 156*78*43mm
Working Environment	Working Temperature: 0°C~40°C Storage Temperature: -40°C~70°C Working Humidity: 10%~90%RH Non-condensing Storage Humidity: 5%~90%RH Non-condensing