


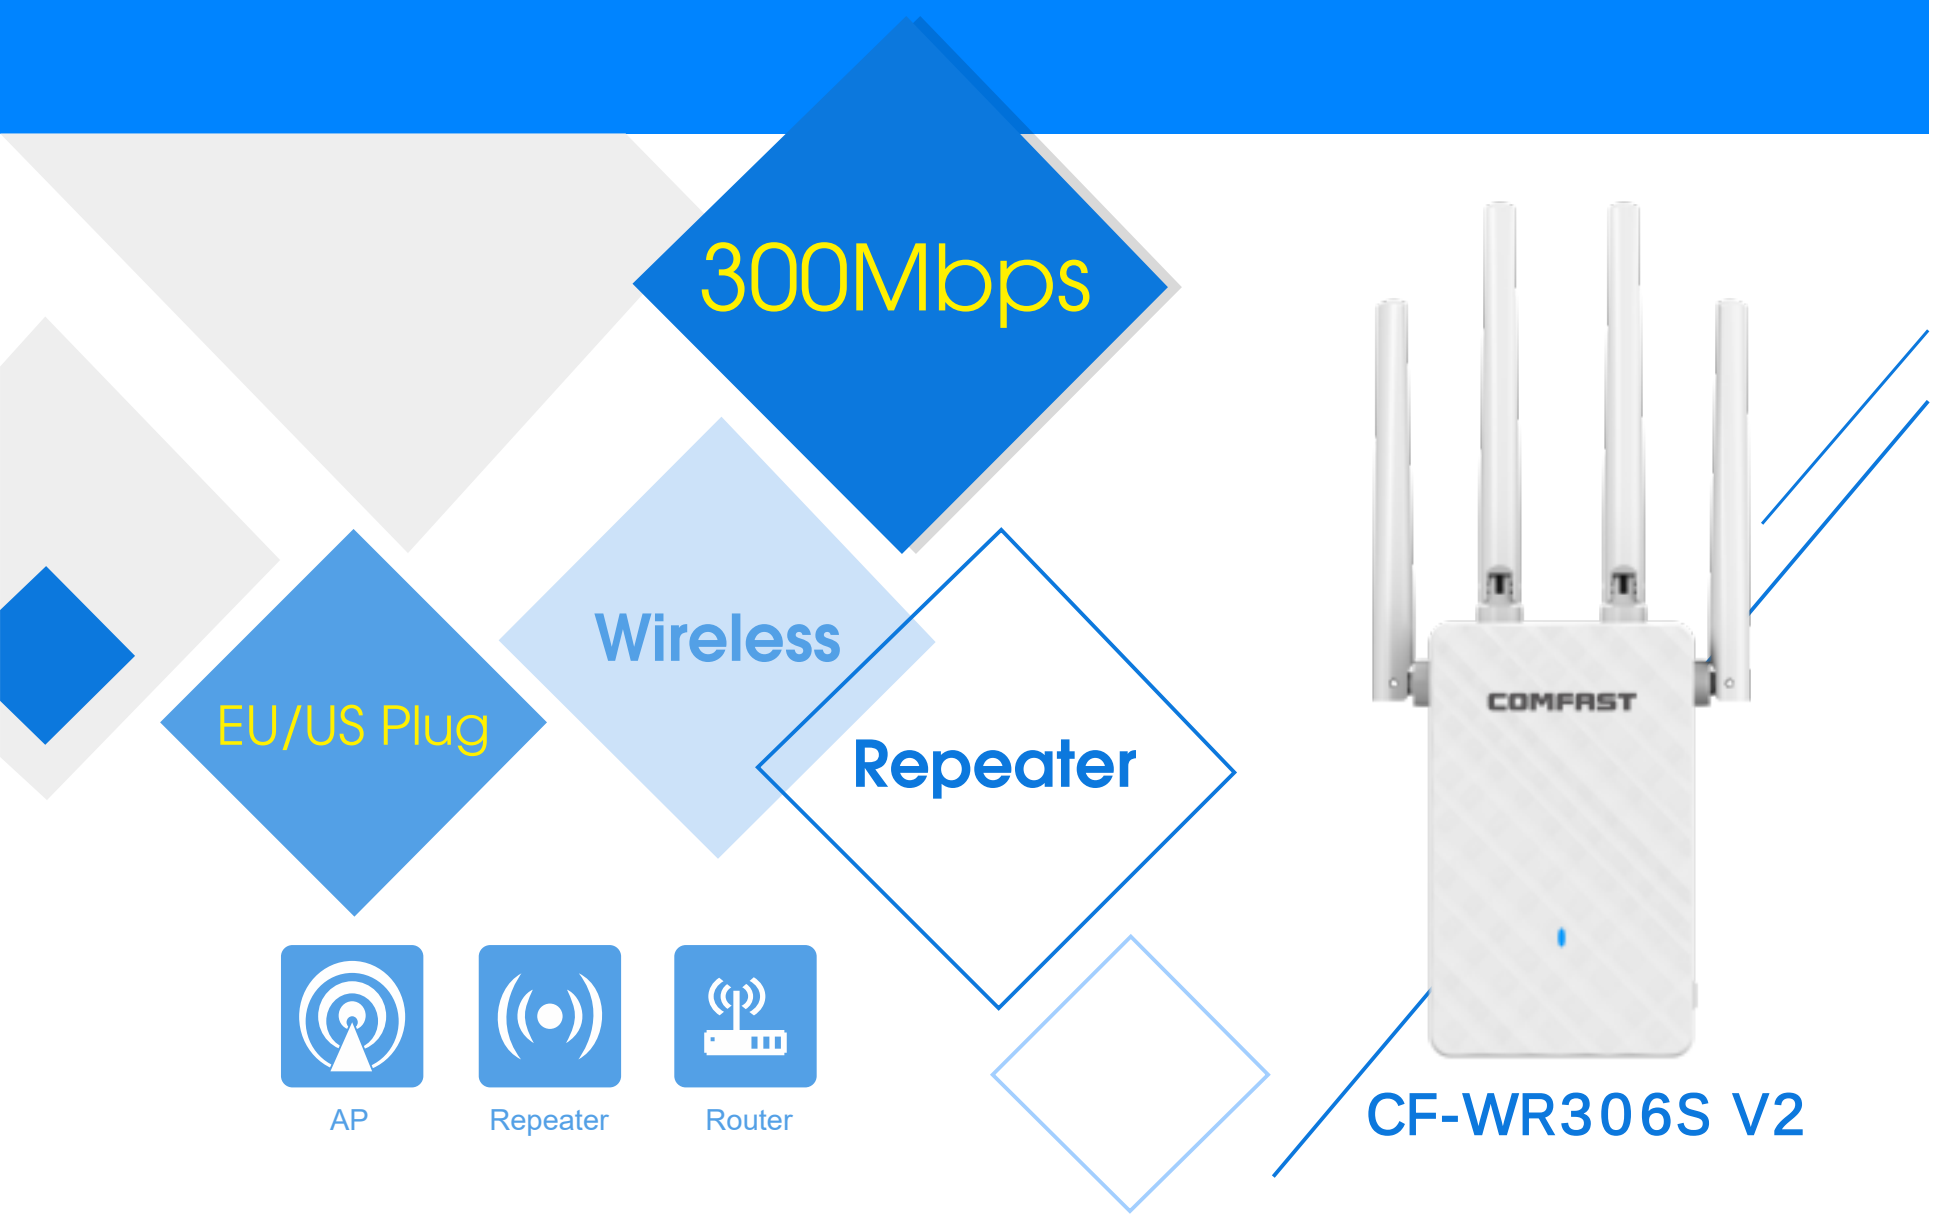

Chipset	RTL8196EU-VE1+RTL8192ER-CG; DDR:8MB;Flash:2MB
Antenna	4*2dBi External Antennas
Wireless Standard	IEEE802.11b/g/n
Transmission Rate	11b: 1/2/5.5/11Mbps 11g: 6/9/12/18/24/36/48/54Mbps 11n: 300Mbps
RF Parameters	Output Power (Max): 82mW(19dBm) Receiver Sensitivity (Min): -96dBm Frequency: 2.412GHz~2.472GHz
Button	1*WPS/RESET Button
Physical Ports	1*10/100Mbps WAN/LAN RJ45 Ethernet Port
Power	Power: 100~240V, 50/60HZ
Encryption	WPA-PSK/WPA2-PSK WPA/WPA2
Working Mode	AP, Repeater, Router,Bridge
Case	Plastic Case (ABS Material)
Physical Features	Size: 196.37*88.1*27.47MM
Working Environment	Working Temperature: 0℃~40℃ Storage Temperature: -40℃~70℃ Working Humidity: 10%~90%RH Non-condensing Storage Humidity: 5%~90%RH Non-condensing